### **▲ HYUNDAI CONSTRUCTION EQUIPMENT**

Head Office(Sales Office)

3F, Bundang First Tower, 55 Bundang-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, 13591, Korea

Americas Operation: Hyundai Construction Equipment Americas, Inc.

6100 Atlantic Boulevard Norcross Ga 30071 U.S.A

TEL (1) 847-678-823-7802 FAX (1) 847-678-823-7778

Europe Operation: Hyundai Construction Equipment Europe N.V.

vundailaan 1

. 3980 Tessenderlo, Belgium.

. TEL (32) 14-56-2200 ΕΔΧ (32) 14-59-340

PLEASE CONTACT



#### **MOVING YOU FURTHER**



# **RULE THE GROUND**

The HX Series exceeds customer's expectation!

Become a true leader on the ground with HCE's HX Series.

# WORK MAX, WORTH MAX

- IPC (Intelligent Power Control) Upgrade
- Attachment Flow Control Option
- New Cooling System with Increased Air Flow
- Fuel Rate Information
- ECO Gauge
- Enlarged Air Inlet with Grill Cover

### MORE RELIABLE, MORE SUSTAINABLE

- Durable Cooling Module
- Reinforced Pin, Bush, and Polymer Shim
- Reinforced Durability of Upper and Lower Structure and Attachments
- Wear Resistant Cover Plate
- Hi-grade (High-pressure) Hoses

# INFOTAINMENT FRONTIER

- Proportional Auxiliary Hydraulic System Option
- Quick Coupler Button Option
- New Front Side Air Conditioning Systems
- Intelligent and Wide Cluster
- New Air Conditioning System
- Audio System





15% increased greater screen from 7 to 8 inch is applied in HX Series. More functions and better resolution are available with adding premium options.

#### **IPC (Intelligent Power Control)**

Upgrade

HX Series adopts the upgraded IPC system. It is able to optimize pump flow rate and power at the various working condition through the individual pump control. Furthermore, optimized design of MCV and pipe line minimizes energy loss such as conflux and throttle loss.



#### Attachment Flow Control Option

HX Series improves pump flow rate by independent control of two pumps. It optimizes attachments for effective flow rate setting depending on attachments (ten breaker types and ten crusher types), enabling various operations matching the site environments.



#### **Eco Gauge**

Eco gauge enables economic operation of machines. The gauge level and color displays engine torque and fuel efficiency level. On top of that, the status of fuel consumption such as average rate and the total amount of fuel consumed is displayed. Hourly and daily based fuel consumption can be checked in the detailed menu as well.



#### **Fuel Rate Information**



#### **Durable Cooling Module**

HX Series has a durable cool-ing module that passed stringent tests, demonstrating the highest productivity in tough working en-vironments



#### **Enlarged Air Inlet with Grill Cover**

Enlarged vent hole of the air inlet side cover and fine net grill to prevent penetration of foreign materials further improve durability.





We make the best performance in rough working conditions without any unsureness with trustworthy HX520L.

#### **Durable Cooling Module**

HX Series has a durable cooling module that passed stringent tests, demonstrating the highest productivity in tough working environments.

# Reinforced Durability of Upper and Lower Structure and Attachments

The upper and lower structure and attachments of HX Series have higher durability than demanded on the site, as proven through numerous tests including road tests and virtual simulation. The wear resistance of the bucket has been improved by use of new material.



# Reinforced Pins, Bushing, and Polymer Shims

HX Series improves lubricity of connecting parts between the equipment and attachments. Gaps with attachments are minimized by wear-resistant long-life pins, bushes, and polymer shims, supporting the highest performance with invariable durability.


#### **Wear Resistant Cover Plate**

A wear-resistant cover plate is installed at the end of the arm to minimize abrasion on the connector between the arm and the bucket. Vibration reduction of buckets enables more stable operation even in high-load work.



#### Hi-grade (High-pressure) Hoses

HX Series uses high-pressure hoses with improved heat and pressure resistance, greatly increasing the durability of the equipment.

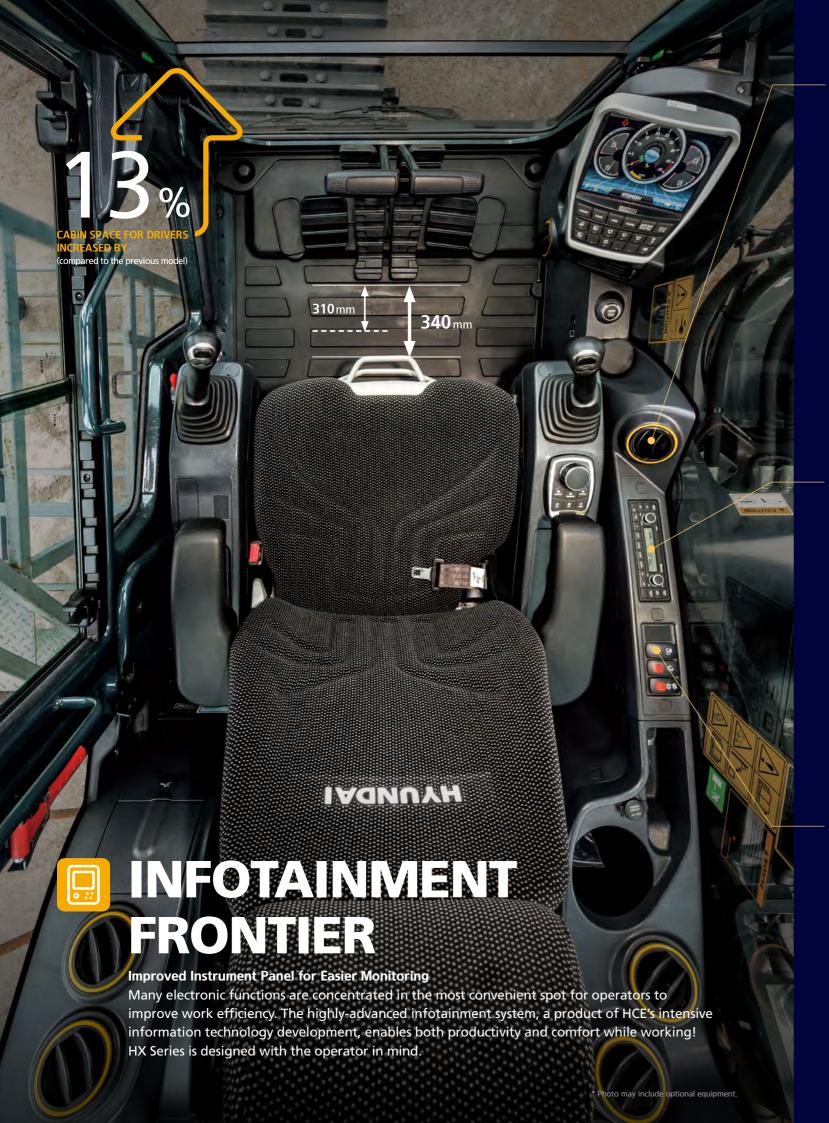

# New Front Side Air-conditioning

The ventilation is designed for both warm and cool air reaching to operator's faces. It could helps operators create more neat and enjoyable atmosphere through indoor air circulation.









#### **Audio System**

The radio player with a USB-based MP3 player, an integrated Bluetooth handsfree feature, and a built-in microphone allow for phone calls while at work and in transit. The radio player is conveniently located on the right side of the operator to allow for improved access.



#### **Quick Coupler Button Option**

Easy attachment replacement of equipment is available with quick coupler but-



#### Proportional Auxiliary Hydraulic System Option

Proportional control switch with better speed control helps operators to enlarge the operation convenience whenever they do time-consuming



#### **Intelligent and Wide Cluster**

The 8" capacitive-type display (like smartphone display) of HX Series is delivering excellent legibility. The centralized switches on the display allow convenience of checking temperature outside the cabin.



\* The above image is 'Premium Type'

#### **New Air Conditioning System**

Front side Air Vent holes make operators more convenient and fresh through direct air flow to driver's face, foot and body.



# MODERN COMFORT, SIMPLE AND SAFE SOLUTION

#### **New Cabin for More Comfort**

Low noise, low vibration, and ergonomic design make the cabin space more comfortable and pleasant! With focus on safety and convenience of operators HX Series allows rapid and safe equipment inspection anytime and anywhere, providing an optimal environment for operators to work.











Option

#### IT'S CONVENIENT, EASY AND VALUABLE

Hi MATE Hyundai's newly developed remote management system, utilizes GPS-satellite technology to provide customers with the highest level of service and product support available. Hi MATE enables users to remotely evaluate machine performance, access diagnostic information, and verify machine locations at the touch of a button.

#### WHAT IS BENEFITS



#### **Increase Productivity**

It helps you operate machines in efficient. You can check the difference between total engine hours and actual working hours. See how productive your machines are and plan any required cost saving solutions. Hi MATE offers working information such as working / idling hours, fuel consumption and rate.



#### **Convenient and Easy Monitoring**

There is nothing much to do to monitor your machines. Just log on to the Hi MATE website or mobile application. Hi MATE allows you to watch your machines whenever and wherever you are.



#### Security

Protect your machines from theft or unauthorized usage with Hi MATE. If the machine moves out of the Geofence boundary, you will get alerts.

# HX520L with advanced technology ensures our safety on a construction site.




HX Series excavators are products of HCE's spirit of initiative, creativity, and strong drive. HCE engineers, who are the best in the industry, have worked tirelessly to offer a zero-defect product. The new HX Series reflects customers' needs in the field gleaned by thorough monitoring.

#### AAVM(Advanced Around View Monitoring) Camera System Option

HX Series has a state-of-the-art AAVM video camera system to secure field of vision for operators in all directions, thereby preventing accidents. Operators can easily check the workplace in the front and rear and to the right and left.

- AAVM(Advanced Around View Monitoring): Secure field of vision in all directions by ten views including 3D bird's eye view and 2D/4CH view.
- IMOD(Intelligent Moving Object Detection): Inform when pedestrians or dangerous objects are moving around the machine waiting for work.

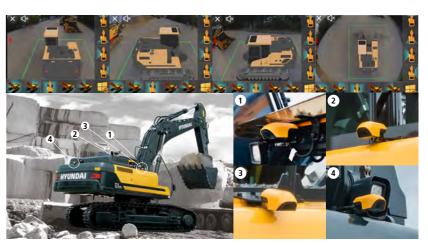

#### Swing Lock System Option

Swing lock system is provided to maintain stability when swing movement needs to be limited, improving operating speed and productivity.

#### **Cabin Suspension Mount**

With a low-vibration design by the coil spring and damper inside the mount, the cab suspension mount of HX Series reduces noise inside the cabin and improves durability, providing a comfortable operation space that lessens operators' fatigue

## **SPECIFICATIONS**

ENGINE	
Maker / Model	CUMMINS / X12
Туре	6 cylinder, water cooled, 4-cycle, turbocharged charge air cooled, direct injection, electronic controlled diesel engine.
Gross Power	250 kW (335 hp) at 2,100 rpm
Net Power	246 kW (330 hp) at 2,100 rpm
Max. Power	276 kW (370 hp) at 1,800 rpm
Peak Torque	1,674 N · m (1,235 lb·ft) at 1,400 rpm
Displacement	11.8 (720 cu in)
Operating Altitude (w/o derate)	2,000 m (6,562 ft)

HYDRAULIC SYSTEM	
MAIN PUMP	
Туре	Variable displacement axial piston pumps
Max. Flow	2 × 394 lpm (104.0 US gpm / 86.7 UK gpm) 1 × 23.9 lpm (6.3 US gpm / 5.3 UK gpm)
Sub-Pump For Pilot Circuit	Gear pump

Cross-sensing and fuel saving pump system

#### HYDRAULIC MOTORS

Travel	Two speed axial pistons motor with brake valve and parking brake
Swing	Axial piston motor with automatic brake

#### RELIEF VALVE SETTING

RELIEF VALVE SETTING		
Implement Circuits	330 kgf/cm <sup>2</sup> (4,694 psi)	
Travel	360 kgf/cm <sup>2</sup> (5,120 psi)	
Power Boost (boom, arm, bucket)	360 kgf/cm <sup>2</sup> (5,120 psi)	
Swing Circuit	285 kgf/cm <sup>2</sup> (4,053 psi)	
Pilot Circuit	40 kgf/cm <sup>2</sup> (569 psi)	
Service Valve	Installed	

#### **HYDRAULIC CYLINDERS**

No. of Cylinder Bore X Stroke	Boom 2-1/10 × 1,580 mm
	Arm 1-Ø190 × 1,850 mm
	Bucket 1-Ø170 $\times$ 1,360 mm 1-Ø160 $\times$ 1,360 mm 9,000mm (29' 6") Boom & 6,000mm (19' 8") Arm
	Only

DRIVES & BRAKES	
Drive Method	Fully hydrostatic type
Drive Motor	Axial piston motor, in-shoe design
Reduction System	Planetary reduction gear
Max. Drawbar Pull	39,674 kgf (87,466 lbf)
Max. Travel Speed (High / Low)	3.3 km/hr (2.1 mph) / 5.3 km/hr (3.3 mph)
Gradeability	35° (70%)
Parking Brake	Multi wet disc

#### CONTRO

Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.

provide aimost error tiess and ratigueless operation.		
Pilot Control	Two joysticks with one safety lever (LH): Swing and arm, (RH): Boom and bucket (ISO)	
Traveling and Steering	Two levers with pedals	
Engine Throttle	Electric, dial type	

SWING SYSTEM	
Swing Motor	Axial piston motor
Swing Reduction	Planetary gear reduction
Swing Bearing Lubrication	Grease-bathed
Swing Brake	Multi wet disc
Swing Speed	8.5 rpm

SERVICE REFILL CAPACITIES			
	liter	US gal	UK gal
Fuel tank	660	174.35	145.18
Engine coolant	43	11.3	9.4
Engine oil	34	9.0	7.5
Swing device	7	1.8	1.5
Final drive (each)	13	3.4	2.9
Hydraulic system (including tank)	499	131.7	109.7
Hydraulic tank	275	72.6	60.4

#### UNDERCARRIAGE

The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets, and a track chain with double or triple grouser shoes.

Center frame	X - leg type
Track frame	Pentagonal box type
No. of shoes on each side	53 EA
No. of carrier roller on each side	3 EA
No. of track roller on each side	9 EA
No. of rail guard on each side	2 EA

#### OPERATING WEIGHT (APPROXIMATE)

Operating weight, including 7,060mm (23' 2") boom, 3,380mm (11' 1") arm, SAE heaped  $2.2m^3$  ( $2.88~yd^3$ ) bucket, lubricant, coolant, full fuel tank, full hydraulic tank, and all standard equipments.

#### OPERATING WEIGHT

Shoes		Operating weight	Ground pressure
Туре	Width mm (in)	kg (lb)	kgf/cm² (psi)
	600 (24")	52,055 (114,760)	0.90 (12.9)
Triple	700 (28")	52,575 (115,910)	0.78 (11.1)
grouser	800 (32")	53,105 (117,080)	0.69 (9.8)
	600HD (24")	52,235 (115,160)	0.91 (12.9)
Double grouser	600 (24")	52,090 (114,840)	0.90 (12.7)

#### AIR CONDITIONING SYSTEM


The air condition system for the machine contains the fluorinated greenhouse gas with global warming potential of R134a. (Global Warming Potential: 1430)

The system hold 0.8 kg refrigerant consisting of a  $CO_2$  equivalent 1.14kg metric tonne. For more information, Please refer to the manual.

## **DIMENSIONS & WORKING RANGE**

#### **HX520L DIMENSIONS**

6.55 m (21' 6"), 7.06 m (23' 2"), 9.0 m (29' 6") BOOM and 2,55 (8' 4"), 2.9 m (9' 6"), 3.38 m (11' 1"), 4.0 m (13' 1"), 6.0 m (19' 8") ARM

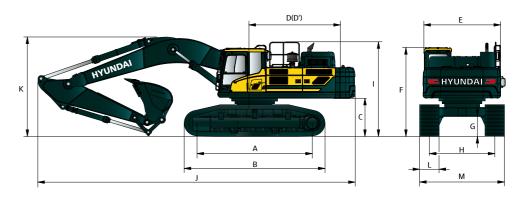

6,550

(21' 6")

2,900

(9' 6")

11,690

(38' 4")

3,970

2,550

(8' 4")

11,680

(38' 4")

3,920

(12' 10")

Unit∶mm (t·in)

9,000

(29' 6")

6,000

(19' 8")

14.080

(46' 2") 3,970

(13' 0")

7,060

(23' 2")

3,380

12,160

3,850

(39' 11") (39' 10")

(11' 1")

4,000

(13' 1")

12,150

3,980

(13' 1")

2,900

(9' 6")

12,210

(40' 1")

3,890

Α	Tumbler Distance	4,470 (14' 8")
*B	Overall Length of Crawler	5,490 (18' 0")
*C	Ground Clearance of Counter Weight	1,445 (4' 9")
D	Tail Swing Radius	3,800 (12' 6")
D'	Rear-End Length	3,745 (12' 3")
E	Overall Width of Upper Structure	2,980 (9' 9")
*F	Overall Height of Cab	3,420 (11' 3")
*G	Min. Ground Clearance	780 (2' 7")
H Track gauge	Extended Extended	2,940 (9' 8")
	Retracted	2,380 (7' 10")
*	Overall Height Guardrail	3,600 (11' 10")

0 (14' 8")		Boom Le	ngth
0 (18' 0")		Arm Leng	gth
45 (4' 9") 00 (12' 6")	J	Overall L	ength
5 (12' 3")	*K	Overall H of Boom	leight
80 (9' 9")			
20 (11' 3")	L	Track Sho	oe Wid
0 (2' 7")			Exten
40 (9' 8")	М	Overall gauge	
30 (7' 10")		33-	Retra

L	Track Sh	oe Width	600 (24")	700 (28")	800 (32")
	Overall	Extended	3,540 (11' 7")	3,640 (11' 11")	3,740 (12' 3")
М	gauge	Retracted	2,980 (9' 9")	3,080 (10' 1")	3,180 (10' 5")

2,550


(8' 4")

12,200

(40' 0")

3,830

#### **HX520L WORKING RANGE**

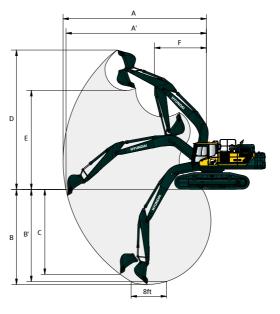

							Unit	mm (ft·in)
	Boom length	6,5 (21'			, .	)60 ' 2")		9,000 (29' 6")
	Arm length	2,550 (8' 4")	2,900 (9' 6")	2,550 (8' 4")	2,900 (9' 6")	3,380 (11' 1")	4,000 (13' 1")	6,000 (19' 8")
Α	Max. digging reach	10,870 (35' 8")	11,130 (36' 6")	11,410 (37' 5")	11,670 (38' 3")	12,060 (39' 7")	12,610 (41' 4")	16,110 (52' 10")
A'	Max. digging reach on ground	10,610 (34' 10")	10,890 (35' 9")	11,170 (36' 8")	11,440 (37' 6")	11,840 (38' 10")	12,400 (40' 8")	15,940 (52' 4")
В	Max. digging depth	6,380 (20' 11")	6,730 (22' 1")	6,820 (22' 5")	7,170 (23' 6")	7,650 (25' 1")	8,270 (27' 2")	11,550 (37' 11")
B'	Max. digging depth (8' level)	6,210 (20' 4")	6,570 (21' 7")	6,650 (21' 10")	7,010 (23' 0")	7,510 (24' 8")	8,140 (26' 8")	11,450 (37' 7")
C	Max. vertical wall digging depth	4,760 (15' 7")	4,820 (17' 9")	5,200 (17' 1")	5,630 (18' 6")	5,410 (17' 9")	6,090 (20' 0")	8,580 (28' 2")
D	Max. digging height	10,760 (35' 4")	10,730 (35' 2")	11,150 (36' 7")	11,170 (36' 8")	11,140 (36' 7")	11,410 (37' 5")	13,180 (43' 3")
E	Max. dumping height	7,290 (23' 11")	7,220 (23' 8")	7,680 (25' 2")	7,710 (25' 4")	7,790 (25' 7")	8,000 (26' 3")	9,880 (32' 5")
F	Min. swing radius	4,440 (14' 7")	4,390 (14' 7")	4,820 (15' 10")	4,880 (16' 0")	4,870 (16' 0")	4,630 (15' 2")	5,630 (18' 6")

 $<sup>\</sup>ensuremath{^{*}}$  This figure includes the size of grousers.

# **LIFTING CAPACITY**

Rating over-front Rating over-side or 360 degree

#### **HX520L MONO BOOM**

6.55 m (21' 6") boom, 2.55 m (8' 4") arm equipped with 600 mm (24") triple grouser shoe.


						Lift-poir	nt radius					Α	t max. reac	h
Lift-po		3.0m	(9.8ft)	4.5m (	14.8ft)	6.0m	19.7ft)	7.5m (2	24.6ft)	9.0m	(29.5ft)	Capa	acity	Reach
heigh (m/ft		b	₩		45)	ď	45)	b	45)	ď	45)	b	₩	m (ft)
9.0m	kg											*13,740	*13,740	5.92
29.5ft	lb											*30,290	*30,290	(19.4)
7.5m	kg					*13,220	*13,220					*12,550	*12,550	7.29
24.6ft	lb					*29,150	*29,150					*27,670	*27,670	(23.9)
6.0m	kg					*14,060	*14,060	*12,430	12,150			*12,050	10,550	8.17
19.7ft	lb					*31,000	*31,000	*27,400	26,790			*26,570	23,260	(26.8)
4.5m	kg			*20,650	*20,650	*15,550	*15,550	*13,010	11,830			*11,820	9,390	8.70
14.8ft	lb			*45,530	*45,530	*34,280	*34,280	*28,680	26,080			*26,060	20,700	(28.5)
3.0m	kg					*17,050	15,740	*13,700	11,450			*11,730	8,840	8.94
9.8ft	lb					*37,590	34,700	*30,200	25,240			*25,860	19,490	(29.3)
1.5m	kg					*17,930	15,160	*14,130	11,120			*11,690	8,720	8.93
4.9ft	lb					*39530	33,420	*31,150	24,520			*25,770	19,220	(29.3)
0.0m	kg			*21,780	*21,780	*17,810	14,880	*14,000	10,930			*11,610	9,020	8.66
0.0ft	lb			*48,020	*48,020	*39,260	32,800	*30,860	24,100			*25,600	19,890	(28.4)
-1.5m	kg	*16,090	*16,090	*21,090	*21,090	*16,590	14,850	*12,900	10,920			*11,370	9,900	8.10
-4.9ft	lb	*35,470	*35,470	*46,500	*46,500	*36,570	32,740	*28,440	24,070			*25,070	21,830	(26.6)
-3.0m	kg	*20,140	*20,140	*17,510	*17,510	*13,900	*13,900					*10,640	*10,640	7.18
-9.8ft	lb	*44,400	*44,400	*38,600	*38,600	*30,640	*30,640					*23,460	*23,460	(23.6)
-4.5m	kg													
-14.8ft	lb													

#### 6.55 m (21' 6") boom, 2.90 m (9' 6") arm equipped with 600 mm (24") triple grouser shoe.

						Lift-poir	nt radius					A	t max. reac	h
Lift-po		3.0m	(9.8ft)	4.5m (	14.8ft)	6.0m (	(19.7ft)	7.5m (	24.6ft)	9.0m (	29.5ft)	Capa	acity	Reach
heigh (m/ft		b	45)	b	<b>=</b>	b	<b>=</b>	b	45)	b	4	b	45)	m (ft)
9.0m	kg											*11,720	*11,720	6.31
29.5ft	lb											*25,840	*25,840	(20.7)
7.5m	kg							*11,790	*11,790			*10,850	*10,850	7.61
24.6ft	lb							*25,990	*25,990			*23,920	*23,920	(25.0)
6.0m	kg					*13,430	*13,430	*11,920	*11,920			*10,600	10,000	8.45
19.7ft	lb					*29,610	*29,610	*26,280	*26,280			*23,370	22,050	(27.7)
4.5m	kg			*19,570	*19,570	*14,950	*14,950	*12,570	11,830			*10,730	8,940	8.97
14.8ft	lb			*43,140	*43,140	*32,960	*32,960	*27,710	26,080			*23,660	19,710	(29.4)
3.0m	kg			*22,960	*22,960	*16,550	15,760	*13,340	11,410	*11,410	87,10	*11,190	8,410	9.21
9.8ft	lb			*50,620	*50,620	*36,490	34,740	*29,410	25,150	*25,150	19,200	*24,670	18,540	(30.2)
1.5m	kg			*19,880	*19,880	*17,610	15,100	*13,890	11,040	*11,490	8,540	*11,210	8,280	9.19
4.9ft	lb			*43,830	*43,830	*38,820	33,290	*30,620	24,340	*25,330	18,830	*24,710	18,250	(30.2)
0.0m	kg			*23,620	22,640	*17,730	14,740	*13,920	10,810			*11,210	8,540	8.93
0.0ft	lb			*52,070	49,910	*39,090	32,500	*30,690	23,830			*24,710	18,830	(29.3)
-1.5m	kg	*17,060	*17,060	*21,710	*21,710	*16,790	14,650	*13,120	10,750			*11,100	9,290	8.39
-4.9ft	lb	*37,610	*37,610	*47,860	*47,860	*37,020	32,300	*28,920	23,700			*24,470	20,480	(27.5)
-3.0m	kg	*22,460	*22,460	*18,470	*18,470	*14,520	*14,520	*10,680	*10,680			*10,650	*10,650	7.51
-9.8ft	lb	*49,520	*49,520	*40,720	*40,720	*32,010	*32,010	*23,550	*23,550			*23,480	*23,480	(24.6)
-4.5m	kg			*13,060	*13,060	*9,620	*9,620					*9,150	*9,150	6.15
-14.8ft	lb			*28,790	*28,790	*21,210	*21,210					*20,170	*20,170	(20.2)

- 1. Lifting capacity are based on ISO 10567.
- 2. Lifting capacity of the HX Series does not exceed 75% of tipping load with the machine on firm,
- level ground or 87% of full hydraulic capacity.

  3. The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).
- 4. (\*) indicates load limited by hydraulic capacity.





Rating over-front Rating over-side or 360 degree

#### **HX520L MONO BOOM**

7.06 m (23' 2") boom, 2.55 m (8' 4") arm equipped with 600 mm (24") triple grouser shoe.


						Lift-poir	nt radius					Δ.	t max. reac	:h
Lift-po		3.0m	(9.8ft)	4.5m (	14.8ft)	6.0m (	19.7ft)	7.5m (	24.6ft)	9.0m (	29.5ft)	Cap	acity	Reach
heigh (m/ft		b	45)	ď	<b>=</b>		45)	b	4		4		<b>=</b>	m (ft)
9.0m	kg											*12,280	*12,280	6.71
29.5ft	lb											*27,070	*27,070	(22.0)
7.5m	kg							*11,560	*11,560			*11,450	11,150	7.94
24.6ft	lb							*25,490	*25,490			*25,240	24,580	(26.1)
6.0m	kg					*13,750	*13,750	*11,880	*11,880			*11,080	9,420	8.75
19.7ft	lb					*30,310	*30,310	*26,190	*26,190			*24,430	20,770	(28.7)
4.5m	kg					*15,380	*15,380	*12,620	11,690	*11,070	8,870	*10,910	8,480	9.25
14.8ft	lb					*33,910	*33,910	*27,820	25,770	*24,410	19,550	*24,050	18,700	(30.3)
3.0m	kg					*16,910	15,380	*13,390	11,260	*11,340	8,670	*10,840	8,020	9.48
9.8ft	lb					*37,280	33,910	*29,520	24,820	*25,000	19,110	*23,900	17,680	(31.1)
1.5m	kg					*17,700	14,830	*13,880	10,920	*11,470	8,500	*10,810	79,20	9.47
4.9ft	lb					*39,020	32,690	*30,600	24,070	*25,290	18,740	*23,830	17,460	(31.1)
0.0m	kg					*17,530	14,590	*13,850	10,720	*11,160	8,400	*10,760	8,160	9.21
0.0ft	lb					*38,650	32,170	*30,530	23,630	*24,600	18,520	*23,720	17,990	(30.2)
-1.5m	kg			*20,350	*20,350	*16,450	14,580	*13,080	10,690			*10,600	8,850	8.69
-4.9ft	lb			*44,860	*44,860	*36,270	32,140	*28,840	23,570			*23,370	19,510	(28.5)
-3.0m	kg	*18,970	*18,970	*17,470	*17,470	*14,320	*14,320	*11,040	10,870			*10,090	*10,090	7.84
-9.8ft	lb	*41,820	*41,820	*38,510	*38,510	*31,570	*31,570	*24,340	23,960			*22,240	*22,240	(25.7)
-4.5m	kg			*12,820	*12,820	*10,190	*10,190					*8,660	*8,660	6.55
-14.8ft	lb			*28,260	*28,260	*22,470	*22,470					*19,090	*19,090	(21.5)

7.06 m (23' 2") boom, 2.90 m (9' 6") arm equipped with 600 mm (24") triple grouser shoe.

1						Lift-poir	nt radius					Α	t max. reac	h
Lift-po heigh		3.0m	(9.8ft)	4.5m (	14.8ft)	6.0m (	(19.7ft)	7.5m (	24.6ft)	9.0m (	29.5ft)	Capa	acity	Reach
(m/ft		ď	4		4		4		45)		45)		45)	m (ft)
9.0m	kg											*11,430	*11,430	7.08
29.5ft	lb											*25,200	*25,200	(23.2)
7.5m	kg							*10,990	*10,990			*10,780	10,500	8.26
24.6ft	lb							*24,230	*24,230			*23,770	23,150	(27.1)
6.0m	kg					*13,130	*13,130	*11,410	*11,410	*10,500	9,010	*10,480	8,940	9.04
19.7ft	lb					*28,950	*28,950	*25,150	*25,150	*23,150	19,860	*23,100	19,710	(29.7)
4.5m	kg			*20,070	*20,070	*14,790	*14,790	*12,200	11,690	*10,710	8,850	*10,370	8,080	9.52
14.8ft	lb			*44,250	*44,250	*32,610	*32,610	*26,900	25,770	*23,610	19510	*22,860	17,810	(31.2)
3.0m	kg					*16,410	15,390	*13,040	11,220	*11,060	8,610	*10,340	7,640	9.74
9.8ft	lb					*36,180	33,930	*28,750	24,740	*24,380	18,980	*22,800	16,840	(32.0)
1.5m	kg					*17,390	14,750	*13,630	10,840	*11,290	8,400	*10,370	7,520	9.73
4.9ft	lb					*38,340	32,520	*30,050	23,900	*24,890	18,520	*22,860	16,580	(31.9)
0.0m	kg			*15,060	*15,060	*17,450	14,430	*13,740	10,600	*11,160	8,280	*10,380	7,720	9.48
0.0ft	lb			*33,200	*33,200	*38,470	31,810	*30,290	23,370	*24,600	18,250	*22,880	17,020	(31.1)
-1.5m	kg			*21,050	*21,050	*16,610	14,370	*13,170	10,530			*10,310	8,320	8.98
-4.9ft	lb			*46,410	*46,410	*36,620	31,680	*29,030	23,210			*22,730	18,340	(29.5)
-3.0m	kg	*21,360	*21360	*18,340	*18,340	*14,760	14,520	*11,550	10,650			*10,000	9,570	8.16
-9.8ft	lb	*47,090	*47090	*40,430	*40,430	*32,540	32,010	*25,460	23,480			*22,050	21,100	(26.8)
-4.5m	kg			*14,070	*14,070	*11,280	*11,280					*9,020	*9,020	6.93
-14.8ft	lb			*31,020	*31,020	*24,870	*24,870					*19,890	*19,890	(22.7)

- 1. Lifting capacity are based on ISO 10567.
- 2. Lifting capacity of the HX Series does not exceed 75% of tipping load with the machine on firm,
- level ground or 87% of full hydraulic capacity.

  3. The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).
- 4. (\*) indicates load limited by hydraulic capacity.



# **LIFTING CAPACITY**

Rating over-front Rating over-side or 360 degree

#### **HX520L MONO BOOM**

7.06 m (23' 2") boom, 3.38 m (11' 1") arm equipped with 600 mm (24") triple grouser shoe.

						Lift-poi	nt radius					l A	At max. reac	h
Lift-po heigh		3.0m	(9.8ft)	4.5m (	14.8ft)	6.0m	(19.7ft)	7.5m (	24.6ft)	9.0m (	29.5ft)	Сар	acity	Reach
(m/ft			<b>=</b>		<b>—</b>		<b>—</b>	ď	4	ď	45)		<b>=</b>	m (ft)
9.0m	kg							*10,020	*10,020			*9,400	*9,400	7.61
29.5ft	lb							*22,090	*22,090			*20,720	*20,720	(25.0)
7.5m	kg							*10,370	*10,370			*8,930	*8,930	8.71
24.6ft	lb							*22,860	*22,860			*19,690	*19,690	(28.6)
6.0m	kg							*10,900	*10,900	*10,010	9,140	*8,830	8,390	9.46
19.7ft	lb							*24,030	*24,030	*22,070	20,150	*19470	18,500	(31.0)
4.5m	kg			*18,770	*18,770	*14,140	*14,140	*11,770	*1,1770	*10,360	8,930	*8,980	7,630	9.92
14.8ft	lb			*41,380	*41,380	*31,170	*31,170	*25,950	*25,950	*22,840	19,690	*19,800	16,820	(32.5)
3.0m	kg					*15,920	15,650	*12,710	1,1350	*10,820	8,680	*9,390	7,230	10.13
9.8ft	lb					*35,100	34,500	*28,020	25,020	*23,850	19,140	*20,700	15,940	(33.2)
1.5m	kg					*17,160	14,930	*13,450	10,930	*11,170	8,440	*9,890	7,120	10.12
4.9ft	lb					*37,830	32,910	*29,650	24,100	*24,630	18,610	*21,800	15,700	(33.2)
0.0m	kg			*17,510	*17,510	*17,540	14,520	*13,750	10,640	*11,230	8,270	*9,970	7,270	9.88
0.0ft	lb			*38,600	*38,600	*38,670	32,010	*30,310	23,460	*24,760	18,230	*21,980	16,030	(32.4)
-1.5m	kg	*12,800	*12,800	*22,130	*22,130	*17,010	14,380	*13,420	10,510	*10,720	8,220	*10,000	7,770	9.40
-4.9ft	lb	*28,220	*28,220	*48,790	*48,790	*37,500	31,700	*29,590	23,170	*23,630	18,120	*22,050	17,130	(30.8)
-3.0m	kg	*21,350	*21,350	*19,710	*19,710	*15,510	14,460	*12,210	10,560			*9,880	8,800	8.62
-9.8ft	lb	*47,070	*47,070	*43,450	*43,450	*34,190	31,880	*26,920	23,280			*21,780	19,400	(28.3)
-4.5m	kg	*19,320	*19,320	*15,920	*15,920	*12,650	*12,650					*9,320	*9,320	7.47
-14.8ft	lb	*42,590	*42,590	*35,100	*35,100	*27,890	*27,890					*20,550	*20,550	(24.5)
-6.0m	kg													
-19.7ft	lb													

#### 7.06 m (23' 2") boom, 4.00 m (11' 1") arm equipped with 800 mm (32") triple grouser shoe.


1:64								Lift-poir	nt radius							At	max. rea	ach
Lift-po heigh		1.5m	(4.9ft)	3.0m	(9.8ft)	4.5m (	14.8ft)	6.0m (	19.7ft)	7.5m (	24.6ft)	9.0m (	29.5ft)	10.5m (	(34.4ft)	Capa	acity	Reach
(m/ft			4		4		45		4		4		4		4		4	m (ft)
9.0m	kg															*7,310	*7,310	8.33
29.5ft	lb															*16,120	*16,120	(27.3)
7.5m	kg											*8,630	*8,630			*6,990	*6,990	9.35
24.6ft	lb											*19,030	*19,030			*15,410	*15,410	(30.7)
6.0m	kg									*10,230	*10,230	*9,440	9,320			*6,930	*6,930	10.05
19.7ft	lb									*22,550	*22,550	*20,810	20,550			*15,280	*15,280	(33.0)
4.5m	kg							*13240	*13240	*11,170	*11,170	*9,910	9,080			*7,050	*7,050	10.48
14.8ft	lb							*29190	*29190	*24,630	*24,630	*21,850	20,020			*15,540	*15,540	(34.4)
3.0m	kg					*20,970	*20,970	*15180	*15180	*12,230	11,530	*10,470	8,790	*8,810	6,910	*7,350	6,720	10.69
9.8ft	lb					*46,230	*46,230	*33470	*33470	*26,960	25,420	*23,080	19,380	*19,420	15,230	*16,200	14,820	(35.1)
1.5m	kg					*19,680	*19,680	*16710	15170	*13,130	11,060	*10,960	8,510	*9,440	6,770	*7,860	6,610	10.67
4.9ft	lb					*43,390	*43,390	*36840	33440	*28,950	24,380	*24,160	18,760	*20,810	14,930	*17,330	14,570	(35.0)
0.0m	kg					*19,280	*19,280	*17450	14640	*13,650	10,710	*11,200	8,300			*8,670	6,720	10.45
0.0ft	lb					*42,510	*42,510	*38470	32280	*30,090	23,610	*24,690	18,300			*19,110	14,820	(34.3)
-1.5m	kg			*12,650	*12,650	*23,060	22,240	*17320	14390	*13,600	10,510	*11,010	8,190			*9,490	7,120	9.99
-4.9ft	lb			*27,890	*27,890	*50,840	49,030	*38180	31720	*29,980	23,170	*24,270	18,060			*20,920	15,700	(32.8)
-3.0m	kg			*19,040	*19,040	*21,120	*21,120	*16250	14370	*12,810	10,490	*10,030	8,210			*9,500	7,910	9.27
-9.8ft	lb			*41,980	*41,980	*46,560	*46,560	*35830	31680	*28,240	23,130	*22,110	18,100			*20,940	17,440	(30.4)
-4.5m	kg			*23,200	*23,200	*17,930	*17,930	*14030	*14030	*10,830	10,660					*9,250	*9,250	8.21
-14.8ft	lb			*51,150	*51,150	*39,530	*39,530	*30930	*30930	*23,880	23,500					*20,390	*20,390	(26.9)
-6.0m	kg					*12,760	*12,760	*9770	*9770							*8,240	*8,240	6.65
-19.7ft	lb					*28,130	*28,130	*21540	*21540							*18,170	*18,170	(21.8)


1. Lifting capacity are based on ISO 10567.

2. Lifting capacity of the HX Series does not exceed 75% of tipping load with the machine on firm,

level ground or 87% of full hydraulic capacity.

3. The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).






Rating over-front Rating over-side or 360 degree

#### **HX520L MONO BOOM**

9.00 m (29' 6") boom, 6.00 m (19' 8") arm equipped with 600 mm (24") triple grouser shoe.

								L	ift-poir	nt radiu	IS								At r	nax. re	ach
Lift-poi		1.5m (4.9ft)	3.0m	(9.8ft)	4.5m (	14.8ft)	6.0m	(19.7ft)	7.5m (	24.6ft)	9.0m (	29.5ft)	10.5m	(34.4ft)	12.0m	(39.4ft)	13.5m	(44.3ft)	Capa	acity	Reach
heigh (m/ft)		<b>₽ ₽</b>	e	45)	b	45)	b	45)	b	45)	b	45)	b	45)	b	45)	b	45)	b	45)	m (ft)
10.5m	kg																		*4,050	*4,050	11.58
34.4ft	lb																		*8,930	*8,930	(38.0)
9.0m	kg														*4,970	*4,970			*3,950	*3,950	12.52
29.5ft	lb														*10,960	*10,960			*8,710	*8,710	(41.1)
7.5m	kg												*5,950	*5,950	*5,630	*5,630			*3,940	*3,940	13.22
24.6ft	lb												*13,120	*13,120	*12,410	*12,410			*8,690	*8,690	(43.4)
6.0m	kg												*6,290	*6,290	*5,830	*5,830	*4,580	*4,580	*3,990	*3,990	13.71
19.7ft	lb												*13,870	*13,870	*12,850	*12,850	*10,100	*10,100	*8,800	*8,800	(45.0)
4.5m	kg								*8,870	*8,870	*7,590	*7,590	*6,720	*6,720	*6,080	5,700	*5,580	4,570	*4,120	*4,120	14.03
14.8ft	lb								*19,550	*19,550	*16,730	*16,730	*14,820	*14,820	*13,400	12,570	*12,300	10,080	*9,080	*9,080	(46.0)
3.0m	kg				*18,150	*18,150	*12,750	*12,750	*9,970	*9,970	*8,290	*8,290	*7,160	6,840	*6,370	5,480	*5,760	4,430	*4,320	4,030	14.19
9.8ft	lb				*40,010	*40,010	*28,110	*28,110	*21,980	*21,980	*18,280	*18,280	*15,790	15,080	*14,040	12,080	*12,700	9,770	*9,520	8,880	(46.5)
1.5m	kg				*9,590	*9,590	*14,260	*14,260	*10,930	10,670	*8,920	8,210	*7,580	6,510	*6,620	5,260	*5,900	4,300	*4,610	3,930	14.18
4.9ft	lb				*21,140	*21,140	*31,440	*31,440	*24,100	23,520	*19,670	18,100	*16,710	14,350	*14,590	11,600	*13,010	9,480	*10,160	8,660	(46.5)
0.0m	kg				*9,080	*9,080	*15,140	13,710	*11,610	10,080	*9,400	7,800	*7,900	6,230	*6,820	5,070	*5,960	4,180	*5,000	3,920	14.01
0.0ft	lb				*20,020	*20,020	*33,380	30,230	*25,600	22,220	*20,720	17,200	*17,420	13,730	*15,040	11,180	*13,140	9,,220	*11,020	8,640	(46.0)
-1.5m	kg	*4,880 *4,880	*6,310	*6,310	*10,540	*10,540	*15,390	13,250	*11,930	9,680	*9660	75,00	*8,070	6,010	*6,890	4,920	*5,900	4,100	*5,560	4,020	13.67
-4.9ft	lb	*10,760 *10,760	*13,910	*13,910	*23,240	*23,240	*33,930	29,210	*26,300	21,340	*21,300	16,530	*17,790	13,250	*15,190	10,850	*13,010	9,040	*12,260	8,860	(44.9)
-3.0m	kg	*7,270 *7,270	*8,890	*8,890	*12,910	*12,910	*15,110	13,060	*11,880	9,470	*9,650	7,320	*8,030	5,880	*6,770	4,840			*5,880	4,230	13.16
-9.8ft	lb	*16,030 *16,030	*19,600	*19,600	*28,460	*28,460	*33,310	28,790	*26,190	20,880	*21,270	16,140	*17,700	12,960	*14,930	10,670			*12,960	9,330	(43.2)
-4.5m	kg	*9,770 *9,770	*11,720	*11,720	*16,010	*16,010	*14,330	13,060	*11,420	9,420	*9,320	7,260	*7,710	5,840	*6,360	4,840			*5,960	46,10	12.44
-14.8ft	lb	*21,540 *21,540	*25,840	*25,840	*35,300	*35,300	*31,590	28,790	*25,180	20,770	*20,550	16,010	*17,000	12,870	*14,020	10,670			*13,140	10,160	(40.8)
-6.0m	kg	*12,520 *12,520	*14,980	*14,980	*16,550	*16,550	*13,030	*13,030	*10,510	9,500	*8,580	7,320	*6,980	5,910					*5,970	5,250	11.48
-19.7ft	lb	*27,600 *27,600	*33,030	*33,030	*36,490	*36,490	*28,730	*28,730	*23,170	20,940	*18,920	16,140	*15,390	13,030					*13,160	11,570	(37.6)
-7.5m	kg		*17,690	*17,690	*13,760	*13,760	*11,070	*11,070	*8,990	*8,990	*7,230	*7,230							*5,850	*5,850	10.20
-24.6ft	lb		*39,000	*39,000	*30,340	*30,340	*24,410	*24,410	*19,820	*19,820	*15,940	*15,940							*12,900	*12,900	(33.5)
-9.0m	kg				*9,860	*9,860	*8,140	*8,140	*64,90	*6,490									*5,350	*5,350	8.48
-29.5ft	lb				*21,740	*21,740	*179,50	*17,950	*14,310	*14,310									*11,790	*11,790	(27.8)

<sup>1.</sup> Lifting capacity are based on ISO 10567.



<sup>2.</sup> Lifting capacity of the HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

<sup>3.</sup> The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).
4. (\*) indicates load limited by hydraulic capacity.

# **BUCKET SELECTION GUIDE & DIGGING FORCE**

#### **BUCKETS**









Rock-HD(Special)

1.81 (2.37)



SAE heaped m³ (yd³) 1.38 (1.80) 2.20 (2.88) 2.79 (3.65) 3.00 (3.92)

2.43 (3.18) 2.20 (2.88) 3.20 (4.19) 2.43 (3.18) 2.79 (3.65) 3.20 (4.19)

Rock-HD(Special) 2.70 (3.53) 3.00 (3.92)

	Canac	14.,						Recor	mmendatior	n mm (ft.in)		
	Capaci					6,550	(21' 6")		7,060 (	23' 2")		9,000 (29' 6")
	m³ (yo	l²)	Width	Weight	Tooth	Во	om		Bo	om		Boom
			mm (in)	kg (lb)	(EA)	2,550	2,900	2,550	2,900	3,380	4,000	6.000
	SAE	CECE		kg (ib)	(_,,,	(8' 4")	(9' 6")	(8' 4")	(9' 6")	(11' 1")	(13' 1")	(19' 8")
	Heaped	Heaped				Arm	Arm	Arm	Arm	Arm	Arm	Arm
(C)	1.00 (1.21)	0.00 (1.10)	0.40 (27.011)	1 425 (2 140)	3	_		_	AIIII		_	AIIII
(G)	1.00 (1.31)	0.90 (1.18)	940 (37.0")	1,425 (3,140)	-	•	•	•		•	•	•
(G)	1.38 (1.80)	1.24 (1.62)	1,130 (44.5")	1,640 (3,620)	4	•	•	•	•	•	•	•
(G)	2.20 (2.88)	1.93 (2.52)	1,600 (63.0")	2,020 (4,450)	5	•	•	•	•	•	•	×
(G)	2.79 (3.65)	2.46 (3.22)	1,795 (70.7")	2,295 (5,060)	5	•	•	•	•	•		×
(G)	3.00 (3.92)	2.64 (3.45)	1,905 (75.0")	2,425 (5,350)	6	•	•	•			<b>A</b>	×
(H)	2.43 (3.18)	2.11 (2.76)	1,745 (68.7")	2,445 (5,390)	5	•	•	•	•	•	•	×
(H)	3.20 (4.19)	2.82 (3.69)	2,015 (79.3")	2,860 (6,310)	6	•	•			<b>A</b>	<b>A</b>	×
(R)	2.20 (2.88)	1.93 (2.52)	1.600 (63.0")	2,605 (5,740)	5	•	•	•	•	•	×	×
(R)	2.43 (3.18)	2.11 (2.76)	1,745 (68.7")	2,730 (6,020)	5	•	•	•	•	•	×	×
(R)	2.79 (3.65)	2.46 (3.22)	1,795 (70.7")	2,970 (6,550)	5	•	•	•	•		×	×
(R)	3.00 (3.92)	2.64 (3.45)	1,905 (75.0")	3,115 (6,870)	6	•	•	•	•	•	×	×
(R)	3.20 (4.19)	2.82 (3.69)	2,015 (79.3")	3,235 (7,130)	6	•		•		<b>A</b>	×	×
(R)	1.81 (2.37)	1.50 (1.96)	1,325 (52.2")	2,685 (5,920)	4	•	•	•	•	•	×	×
(R)	2.70 (3.53)	2.39 (3.13)	1,760 (69.3")	2,755 (6,070)	5	•	•	•	•		×	×
(R)	3.00 (3.92)	2.76 (3.61)	1,955 (77.0")	3,040 (6,700)	6	0	•	•			×	×

(G) General Purpose

(H) Heavy Duty

(R) Rock-HD

- : Applicable for materials with density of 2,100 kg/m³ (3,500 lb/yd³ ) or less
- Applicable for materials with density of 1,800 kg/m³ (3,000 lb/yd³) or less
- : Applicable for materials with density of 1,500 kg/m³ (2,500 lb/yd³ ) or less
- $\blacktriangle$  : Applicable for materials with density of 1,200 kg/m³ (2,000 lb/yd³ ) or less
- **x**: Not Recommended

#### **ATTACHMENT**

Booms and arms are of all-welded, low-stress, full-box section design.

6,550 mm (21' 6"), 7,060 mm (8' 2"), 9,000 mm (29' 6") boom and 2,550 mm (8' 4"), 2,900 mm (9' 6"), 3,380 mm (11' 1"), 4,000 mm (13' 1"), 6,000 mm (19' 8") arms are available, Hyundai Bucket are all-welded, high-strength steel implements.

	G FORCE		6 550	(21' 6")		7060	ייר יכני)		0.000 (20' 6")	
Boom	Length	mm (ft.in)		(21' 6")			(23' 2")		9,000 (29' 6")	-
	Weight	kg (lb)		(9,370)		4,420	. , .		5,040 (11,100)	Remark
Arm	Length	mm (ft.in)	2,550 (8' 4")	2,900 (9' 6")	2,550 (8' 4")	2,900 (9' 6")	3,380 (11' 1")	4,000 (13' 1")	6,000 (19' 8")	
AIIII	Weight	kg (lb)	2,450 (5,400)	2,630 (5,840)	2,450 (5,400)	2,650 (5,840)	2,650 (5,890)	2,730 (6,020)	3,260 (7,190)	
		kN	240.3 [262.1]	240.3 [262.1]	240.3 [262.1]	240.3 [262.1]	240.3 [262.1]	240.3 [262.1]	212.8	
	SAE	kgf	24,500 [26,730]	24,500 [26,730]	24,500 [26,730]	24,500 [26,730]	24,500 [26,730]	24,500 [26,730]	21,700	
Bucket		lbf	54,010 [58,930]	54,010 [58,930]	54,010 [58,930]	54,010 [58,930]	54,010 [58,930]	54,010 [58,930]	47,840	
Digging Force		kN	279.5 [304.9]	279.5 [304.9]	279.5 [304.9]	279.5 [304.9]	279.5 [304.9]	279.5 [304.9]	247.1	
	ISO	kgf	28,500 [31,090]	28,500 [31,090]	28,500 [31,090]	28,500 [31,090]	28,500 [31,090]	28,500 [31,090]	25,200	
		lbf	62,830 [68,540]	62,830 [68,540]	62,830 [68540]	62,830 [68540]	62,830 [68540]	62,830 [68540]	55,560	[]: Power
		kN	235.4 [256.7]	218.7 [238.6]	235.4 [256.7]	218.7 [238.6]	198.1 [216.1]	173.6 [189.4]	127.5	Boost
	SAE	kgf	24,000 [26,180]	22,300 [24,330]	24,000 [26,180]	22,300 [24,330]	20,200 [20,040]	17,700 [19,310]	13,000	
Arm		lbf	52,910 [57,720]	49,160 [53,640]	52,910 [57,720]	49,160 [53,640]	44,530 [48,590]	39,020 [42,570]	28,660	
Crowd Force		kN	246.2 [268.5]	227.5 [248.2]	246.2 [268.5]	227.5 [248.2]	205.0 [223.6]	179.5 [195.7]	130.4	
	ISO	kgf	25,100 [27,380]	23,200 [25,310]	25,100 [27,380]	23,200 [25,310]	20,900 [22,800]	18,300 [19,960]	13,300	1
		lbf	55,340 [60,360]	51,150 [55,800]	55,340 [60,360]	51,150 [55,800]	46,080 [50,270]	40,340 [44,000]	29,320	

Note: Boom weight includes arm cylinder, piping, and pin Arm weight includes bucket cylinder, linkage, and pin

# **STANDARD / OPTION**

ENGINE Cummins X12		STD	OPT
HYDRAULIC SYSTEM			
NTELLIGENT POWER CONTROL (IPC)			
3-power mode, 2-work mode, user m	ode	•	
Variable Power Control		•	
Pump Flow Control		•	
Attachment Mode Flow Control			•
Engine Auto Idle		•	
Engine Auto Shutdown Control Hyundai Bio Hydraulic Oil (HBHO)		•	•
CAB & INTERIOR SO STANDARD CABIN			
Rise-up type windshield wiper		•	
Radio / USB player		•	
Handsfree mobile phone system with	USB	•	
12 volt power outlet (24V DC to 12V D	OC converter)	•	
Electric horn		•	
All-weather steel cab with 360° visib	oility	•	
Safety glass - Tempered glass Safety glass - Tempered glass with fr	ont laminated glass	•	•
Sliding fold-in front window	ont laminated glass	•	_
Sliding side window(LH)		•	
Lockable door		•	
Hot & cool box		•	
Storage compartment & Ashtray		•	
Transparent cabin roof-cover Sun visor		•	
Door and cab locks, one key		•	
Pilot-operated slidable joystick		•	
Console box height adjust system		•	
AUTOMATIC CLIMATE CONTROL			
Air conditioner & heater		•	
Defroster		•	
Starting Aid (air grid heater) for cold	weather	•	
CENTRALIZED MONITORING			
8" LCD Display - Normal type 8" LCD Display - Premium type		•	•
Engine speed or Trip meter/Accel.		•	_
Engine coolant temperature gauge		•	
Max power		•	
Low speed/High speed		•	
Auto idle		•	
Overload warning with alarm			•
Check Engine Air cleaner clogging		•	
Indicators		•	
ECO Gauges		•	
Fuel level gauge		•	
Hyd. oil temperature gauge		•	
Fuel warmer		•	
Warnings Communication error		•	
Low battery		÷	
Clock		•	
Cabin lights			•
Cabin front window rain guard			•
Cabin roof-steel cover			•
SEAT			
Mechanical Suspension with Heater	_	•	
Mechanical Suspension without Heate Adjustable Air Suspension without He			•
Adjustable Air Suspension with Heate	r		•
OPERATOR PROTECTIVE STRUCTUR	RES		
General		•	
FOG (Falling Object Guard)	Front & Tops Guard		•
ISO 10262 Level2	Top Guard		•
CABIN ROPS (ISO 12117-2)			

SAFETY	STD	OPT
Battery master switch	•	
Rearview camera		•
AAVM (Advanced Around View Monitoring)		•
Six front working lights (4 boom mounted, 2 front frame mounted)	•	
Travel alarm	•	
Rear work lamp	•	
Beacon lamp		•
Automatic swing brake	•	
Boom holding system	•	
Arm holding system  Safety lock valve for boom cylinder with overload warning	•	
device		•
Safety lock valve for arm cylinder		•
Swing Lock System Three outside rearview mirror	•	•
ATTACHMENT		
BOOMS		
6.55m, 21' 6" 7.06m, 23' 2"		•
9,00m, 29' 6"	•	
ARMS		
2.55 m, 8' 4"		•
2.90 m, 9' 6"		•
3.38 m, 11' 1"	•	
4,00 m, 13' 1"		•
6,00 m, 19' 8"		•
OTHERS		
Removable Clean-Out Dust Net for Cooler	•	
Removable Reservoir Tank	•	
Fuel Pre-Filter	•	
Fuel Warmer	•	
Self-Diagnostics System	•	
Hi MATE (Remote Management System)		•
Batteries (2 × 12 V × 200 AH)	•	_
Fuel Filler Pump (50 lpm) Single-Acting Piping Kit (Breaker, etc.)		-
Double-Acting Piping Kit (Clamshell, etc.)		
Rotating Piping Kit		•
Quick Coupler Piping		•
Quick Coupler		•
Accumulator for Lowering Work Equipment	•	
Pattern Change Valve (2 Patterns)		•
Semi-Auto Grease(Pump&Gun)		•
Air Cleaner - Wet Tool Kit		•
UNDERCARRIAGE		
Lower Frame Under Cover (Additional)  Lower Frame Under Cover (Normal)	•	•
TRACK SHOES		
Triple Grouser Shoe (600 mm, 24")	•	
Triple Grouser Shoe (700 mm, 28")		•
Triple Grouser Shoe (800 mm, 32")		•
Triple Grousers Shoe HD(600 mm, 24")		•
Double Grouser Shoe (600 mm, 24")		•
Track Rail Guard	•	
Full Track Rail Guard		•
* Standard and optional equipment may vary. Contact your Hyundai dealer for m The machine may vary according to International standards. * The photos may include attachments and optional equipment that are not avail		

<sup>\*</sup> The photos may include attachments and optional equipment that are not available in your area.

\* Materials and specifications are subject to change without advance notice.

<sup>\*</sup> All imperial measurements rounded off to the nearest pound or inch.